

The logo for UNKA SOUND SYSTEMS is centered on a dark, textured background. It features a stylized 'U' and 'K' symbol on the left, followed by the word 'UNKA' in a large, bold, italicized font. Below 'UNKA' is the phrase 'SOUND SYSTEMS' in a smaller, italicized font. A red, brush-stroke-like line is positioned below the text.

UNKA
SOUND SYSTEMS

Unique Audio Solutions



IKS12A

ACTIVE SUBWOOFER

Our IKS12A is an active subwoofer based on 12" Neodymium speaker that delivers 600w of power.

Its small size and low weight makes it an ideal partner to some of our satellite speakers like MAK3P.

PRODUCT DESCRIPTION:

IKS12A is an active subwoofer that delivers 600W of power packed in very small size box and very low weight of only 15kg.


It is equipped with two channel "Powersoft" class D amplifier controlled by our DSP and with 4-programmed presets.

APPLICATIONS:

- Small PA systems.
- Audio-Visual applications.
- Conference halls.
- Small Disco-Bars.
- Drum Fill and Side Fill systems.



TECHNICAL SPECIFICATIONS IKS12A

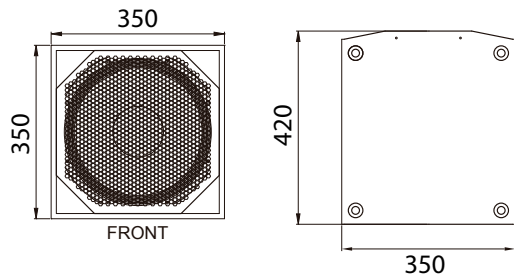

COLORS & PREMIUM FINISHES AVAILABLE



Black



White



Custom

Technical Specifications

GENERAL	
Speaker Handling	600w
Maximum Amplifier Power	700w 8 Ohm
Transducers	1x 12" neodymium magnet woofer 3" voice coil.
Frequency Response	45 Hz – 250 Hz (-3 dB) preset dependent.
Maximum SPL	136 dB (peak)
Coverage	Omni
CROSSOVER	
Frequency	250 hz.
Type	DSP controlled preset speakers
AUDIO OUTPUT	
Connectors	1x Speakon out subwoofer / 1x Speakon out tops
Wiring	PIN1+ = CH1+ / PIN1- = CH1- PIN2+ =N.C. / PIN2- = N.C.
POWER INPUT	
Connectors	1x Powercon In / 1x Powercon link
AMPLIFIERS	
Type	1x Modules class D - Dsp controlled
Power	2x 700 watt @ 8 Ohm
Protections	Dinamic limiter, over current, over temp, short circuits.
AC POWER	
Operating range	Standard 90 - 240 Vca 50Hz. (standard) /
Max continuous and burst current	Standard 6A (>10sec.)
HANDLING	
Dimensions (WxHxD)	350 x 350 x 420 mm (13,78 x 13,78 x 16,53 in)
Weight	15 kg / 33,07 lb